


# GD63WU Ovalux Series

Wall Mounted  
Indirect Illumination



1 x T8



## Construction

**Housing:** Extruded aluminum body 6.000" wide x 3.625" high, 6063T5, 0.093" minimum thickness. Available in one piece, unbroken lengths up to 12'.

**Joiner System:** Automatic alignment, no loose parts, one tool to tighten two factory installed bolts for a hairline seam. No light leaks.

**Ballast:** Osram - Sylvania or equal electronic RS ballast with less than 10% THD is standard: **ERS**.

**Mounting and Feed:** **WM** direct to wall mounting system.

## Electrical

UL listed wiring and components throughout. Housing is completely wired with quick-connect plugs at all mating joints and individually tested. No fixture disassembly and no field wiring is required to install rows.

All fixtures bear UL & CUL Dry Location labels. Damp Location labels are available. Specify **DL** in the Options field.

## Optical Performance


**Reflectors:** 87% reflectance white painted aluminum.

**Acrylic Prismatic Lens:** Specify **SAPL** for optional widespread 0.093" clear acrylic prismatic lens.

## Finish

Housing assembly is electrostatically sprayed with high solids aliphatic two component polyurethane to an average thickness of 2 mils. over acid etching primer. Specify **H** for high gloss in Paint Finish field. Specify **SG** for semi gloss.

## Standard Features

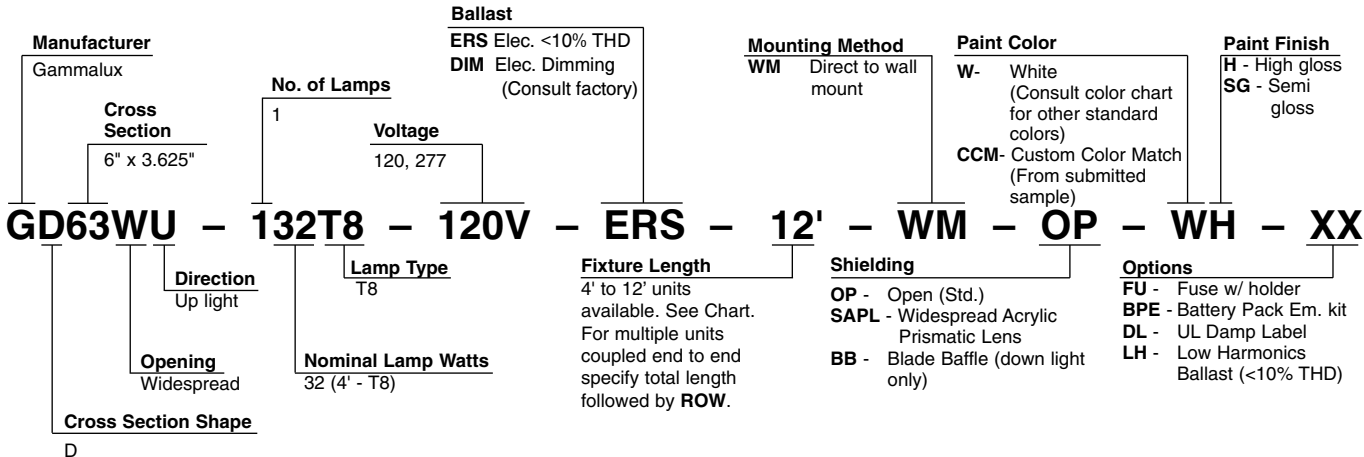

**Mounting Dimensions**

For individual and continuous rows of luminaires

