




Click or scan QR code to view latest spec sheet

NEED FLUORESCENT?
CLICK HERE

Revision Date: November 17, 2017
Gammalux Lighting Systems reserves the right to change details of fixture designs and construction at any time.

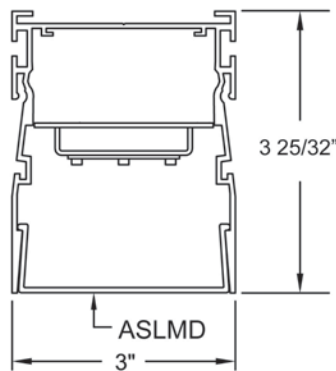

LED Lamping



Click photo to view product page

Page 1: Overview & Nomenclature
Pages 2-3: Specifications
Pages 4-5: Photometric Info / Downloads
Page 6: Mounting Details
Pages 8-9: Mud Flange & Images
Page 10: Custom Programming

Product Overview (for complete specifications, see pages 2 & 3)

Upgrade Capability: LED components may be easily upgraded in the field to increase energy efficiency. Tool-less fastener allows quick LED retrofit while fixtures are still installed on site.

Construction: I.C. rated. Extruded aluminum housing provides superior fit and finish. Grid mounted version can be installed from below. Runs of fixtures can be built to match field conditions, including complex patterns. Continuous runs and patterns are ordered, built and shipped with a single item #.

Continuous Illumination: LED arrays can be oriented to provide consistent illumination in custom-length runs. 90 + CRI available.

Electrical: LED components by major manufacturers. Fixtures can be fitted with integral sensors, control interface devices and specialty LED components (consult factory). Standard Output, High Output and Custom Output options available.

Optical: Flush lenses available in medium or heavy diffusion.

Standard Nomenclature

Manufacturer	Output	Driver Options	Ceiling System	Paint Colors
Gammalux	S Standard Output H High Output (If RGB, select H) C Custom-Programmed Output	DVR Static Driver For Dimming Options, See pg 2	GFR Gyp Type Ceiling with Cover Flange GMR Gyp Type Ceiling Mud Flange NFR No Flange	T1TW 15/16" Flat Grid with Tegalur Tiles T1W 15/16" Flat TBar T9TW 9/16" Flat Grid with Tegalur Tiles T9W 9/16" Flat TBar TSW 9/16" Slot Grid
Cross Section (nom) 3" x 4"	Color Temp. (nom) 27 2700 K 50 5000 K 30 3000 K RGB (select output code H) * 35 3500 K 40 4000 K	Mounting Method REC Recessed Mtd (Consult factory for in-wall installation)		W White (Consult Color Chart for other standard colors) CCM Custom Color Match
Housing Recessed				Paint Finish H High Gloss SG Semi-Gloss
GB34RC2	1SL358	120V	DVR - 4' N-REC/XXXX	ASLMD
Luminaire Model 2nd Generation	CRI ** 8 for 80+ 9 for 90+	Fixture Length Up to 12' single-piece housings available. Specify continuous runs in total length. For layouts in pattern specify PTN and attach drawing.	Length Option N Nominal length S Specific length	Shielding *** ASLMD Acrylic Satin Lens (Medium Diffuse) ASLHD Acrylic Satin Lens (Heavy Diffuse)
Cross Section Shape Beam	Lamp Type LED	Voltage 120, 277, UNIV		Options BPE Battery Pack EM. Kit DL UL Damp Label EMERG Emergency ckt.
LED Arrays in X-Sec 1 (for white only) 2 (for RGB only)				

* RGB must be High Output and controlled by DMX driver option

** 90+ CRI option increases wattage by nom. 8%. For RGB, do not select a CRI option.

*** Shielding options are ASLMD and ASLHD only.



Specifications (continued on next page)

Electrical

Output: Standard (**S**) and high (**H**) options deliver a pre-set lumen package through the fixture shieldding (see chart below). Custom-programmed output (**C**) is specified as 50-99% of the high output lumen or watts-per-foot value (restrictions apply).

Static Driver: Osram [Optotronic](#)* programmable driver, wired for static operation (**DVR**).

0-10V Dimming: Osram [Optotronic](#)* programmable driver, wired for 0-10v control and dimming to 10% (**ZTV10**) or to 1% (**ZTV1**).

Step Dimming: Generic step dimming driver, two hot inputs for 100% and 50% output (**SD2**).

DMX Dimming: Generic DMX driver with three loose control wires exiting fixture at power feed location (**DMX**).

DALI Dimming: Generic DALI driver with two loose control wires exiting fixture at power feed location (**DALI**).

Lutron Dimming: [Hi-Lume 1%](#) via EcoSystem control (**L3DAE**). [Hi-Lume 1%](#) via 3-wire control (**L3DA3W**). [Hi-Lume 1%](#) EcoSystem with Soft-On, Fade-to-Black (**LDE1**). [5-Series](#) dim to 5% EcoSystem (**LDE5**).

White Emitter*: Nichia 757G emitters binned within 3 MacAdam ellipses in Osram PrevaLED Linear or Gammalux proprietary array. 90+ CRI option (CRI code **9**) results in nom. 8% drop in efficacy; increase calculated wattage by 8%

RGB: Uses two rows of Osram [72618](#)*. RGB with all channels at full output consumes approximately 11 watts per foot.

- Red channel at full output will provide approximately the same # of lumens compared to our 3,500K white at High Output.

- Green channel at full output will provide approximately 171% of lumens compared to our 3,500K white at High Output.

- Blue channel at full output will provide approximately 35% of lumens compared to our 3,500K white at High Output.

Battery Pack: Integral Bodine [BSL310LP](#)* (**BPE**). 4W max input. 10W initial output.

LED System: 70% lumen output (L70) at max 85 degrees C calculated at >60k hours. Fixtures are shipped with anti-static gloves to minimize the risk of damage to LEDs during installation. [5 year limited warranty](#).

Upgrade Capability: LED assemblies can be replaced in the future with the latest factory-provided and fully warranted components.

On-board sensors, On-board sensors and control interface devices and alternate LED components may be specified (consult factory).

Max driver cross section 1.0" x 1.2". Fixtures bear UL & cUL Dry Location label. Damp Location label available (**DL**).

*Subject to availability; may be substituted by Gammalux. Components and specifications may be changed without notice.

ESTIMATED LUMENS PER FOOT DELIVERED BY COMBINATION OF 80+ CRI LEDs AND LENS OPTION											
STANDARD OUTPUT 6.35 WPF (nom)						HIGH OUTPUT 8.83 WPF (nom)					
OPTIONS	2700 K	3000 K	3500 K*	4000 K	5000 K	OPTIONS	2700 K	3000 K	3500 K*	4000 K	5000 K
ASLMD	507	540.1	551.1	573.1	584.2	ASLMD	676.2	720.3	735.0	764.4	779.1
ASLHD	370.9	395	403.1	419.2	427.3	ASLHD	494.4	526.7	537.4	558.9	569.6
Consult factory for options on custom output or wattage consumption. *IES files were created using 3500K boards. Values were then adjusted by a factor of .92 for 2700K, .98 for 3000K, 1.04 for 4000K and 1.06 for 5000K boards.											

Construction

Housing: I.C. rated. Extruded aluminum body 3.00" wide x 3.78" high, 6063T5, 0.070" min thickness. In continuous runs, each housing is 12' max unless longer housings are pre-coordinated with the factory to reduce joints and save installation labor. All fixtures are built per approved factory drawings and tested as a complete system at the factory. Continuous runs and patterns are ordered, built and shipped with a single item #. Fixtures ordered as individuals cannot be joined together in the field.

Joiner System: Automatic alignment, no loose parts, one tool to tighten two factory installed bolts for hairline seam. No light leaks.

Lamping: Runs ordered in Specific Length (Length Option **S**) require special lamping components to create consistent illumination and may have a higher than normal price per foot. Runs ordered in Nominal Length (Option **N**) may be length-adjusted at the factory to use standard lamping components. Factory drawings will show all dimensions for approval prior to production. Fixtures built to less than 4' may not achieve posted lumens per foot - consult factory.

Mounting: Recessed into a ceiling system (**REC**). Grid mounted fixtures can be installed from below. Consult factory for in-wall installation. Mud flange (**GMR**) includes integral expansion gap to allow for heat expansion with no pressure on surrounding plaster. **FIXTURE MUST BE INSTALLED PRIOR TO GYP.**

Specifications (continued)

Optical

Reflectors: Shall be formed diffuse high reflectance aluminum.

Acrylic Satin Lens, Medium Diffuse: Snap-in. Shall be 100% DR acrylic Multiply efficiency by .93.

Acrylic Satin Lens, Heavy Diffuse: Snap-in. Shall be 100% DR acrylic (**ASLHD**). Multiply efficiency by .68.

See lens images on photometric pages.

Finish

Housing is electrostatically sprayed with high solids aliphatic two component polyurethane to an average thickness of 2 mills. over acid etching primer or commercial clear anodizing. Specify **H** for high gloss or **SG** for semi-gloss. See Wood Finishes on back page.

High Gloss Finish			Semi Gloss Finish			
						
White (WH)	Red (RH)	Yellow (YH)	White (WSG)	Silver (SSG)	Gray (GYSG)	Off White (OWSG)
						
Green (GH)	Blue (BH)	Black (BKH)	Light Gray (LGYSG)	Bronze (BZSG)	Satin Aluminum (SAPSG)	

Packing and Shipping

Fixtures built for continuous rows are given a specific location identifier, clearly identified on factory layout drawings provided to installing contractor. Location identifier is printed on the fixture's ID Label, protective wrapping and on each end of fixture carton. Shipping pallets are built with 2" clearance, extending beyond the length and width of cartons, providing shipping protection.

Approx. weight of 4' module is 13 lbs. including carton. Weight of pallet and supplemental packing materials not factored in.

Photometric Reports for
STANDARD OUTPUT FIXTURES

FIXTURE USES LENS ASLMD (MEDIUM DIFFUSE) AND 3500 K BOARDS. @ 80+ CRI



IESNA: LM 79-2008
ISSUEDATE: 04/17/13
TEST: ITL76971 mod to 2016 COMP
TESTLAB: Photopia 3.2.6
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GB34D2-SOLED35-4'-ASLMD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 86.8 LPW
DISTRIBUTION % UP: 0%
DISTRIBUTION % DOWN: 100%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 0.24 (Feet)
Length: 3.96
Height: 0.00
INPUT WATTS: 25.4



Acrylic Satin Lens,
Medium Diffuse
(ASLMD)

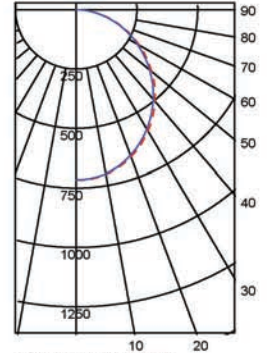

Quadrilaterally Symmetric
Dashed: 0 Degrees Solid: 90 Degrees



FIXTURE USES LENS ASLHD (HEAVY DIFFUSE) AND 3500 K BOARDS. @ 80+ CRI



IESNA: LM 79-2008
ISSUEDATE: 04/18/13
TEST: ITL76972 mod to 2016 COMP
TESTLAB: ITL, INC
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GB34D2-SOLED35-4'-ASLHD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 63.5 LPW
DISTRIBUTION % UP: 0%
DISTRIBUTION % DOWN: 100%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 0.24 (Feet)
Length: 3.96
Height: 0.00
INPUT WATTS: 25.4



Acrylic Satin Lens,
Heavy Diffuse
(ASLHD)

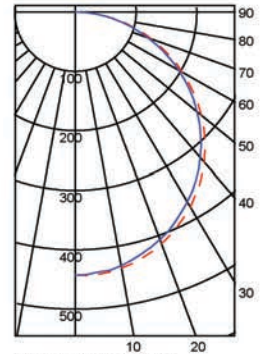

Quadrilaterally Symmetric
Dashed: 0 Degrees Solid: 90 Degrees



**Photometric Reports for
HIGH OUTPUT FIXTURES**

FIXTURE USES LENS ASLMD (MEDIUM DIFFUSE) AND 3500 K BOARDS. @ 80+ CRI



IESNA: LM 79-2008
ISSUEDATE: 04/16/13
TEST: ITL76971 mod to 2016 COMP
TESTLAB: ITL, INC
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GB34D2-HOLED35-4'-ASLMD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 83.3 LPW
DISTRIBUTION % UP: 0%
DISTRIBUTION % DOWN: 100%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 0.24 (Feet)
Length: 3.96
Height: 0.00
INPUT WATTS: 35.3



Acrylic Satin Lens,
Medium Diffuse
(ASLMD)

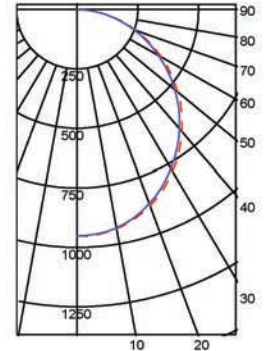

Quadrilaterally Symmetric
Dashed: 0 Degrees Solid: 90 Degrees

FIXTURE USES LENS ASLHD (HEAVY DIFFUSE) AND 3500 K BOARDS. @ 80+ CRI



IESNA: LM 79-2008
ISSUEDATE: 04/16/13
TEST: ITL76972 mod to 2016 COMP
TESTLAB: ITL, INC
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GB34D2-HOLED35-4'-ASLHD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 60.9 LPW
DISTRIBUTION % UP: 0%
DISTRIBUTION % DOWN: 100%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 0.24 (Feet)
Length: 3.96
Height: 0.00
INPUT WATTS: 35.3



Acrylic Satin Lens,
Heavy Diffuse
(ASLHD)

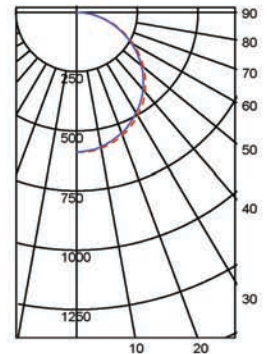


Quadrilaterally Symmetric
Dashed: 0 Degrees Solid: 90 Degrees

Mounting Details


Factory Drawings: Fully dimensioned factory drawings will be provided upon receipt of purchase order.

Grid Mount


15/16" Flat TBar:
Specify **T1W** code in catalog #

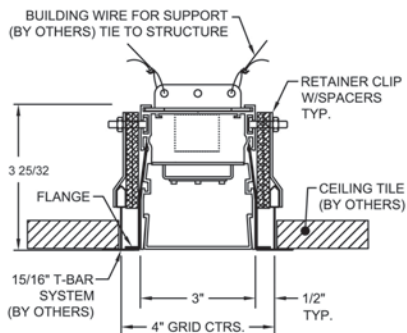


9/16" Flat TBar:
Specify **T9W** code in catalog #

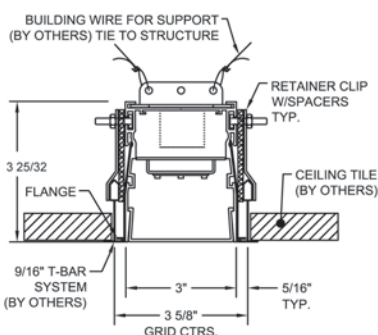


15/16" Flat TBar with Tegular Tiles:
Specify **T1TW** code in catalog #

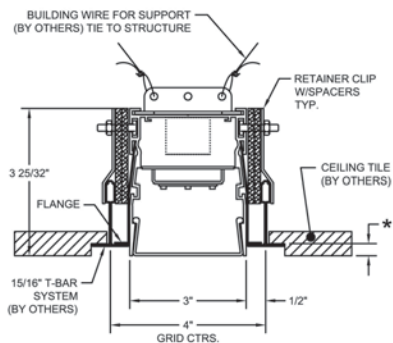

9/16" Flat TBar with Tegular Tiles:
Specify **T9TW** code in catalog #

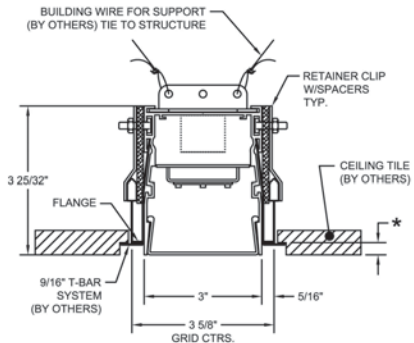


9/16" Slot Grid:
Specify **TSW** code in catalog #

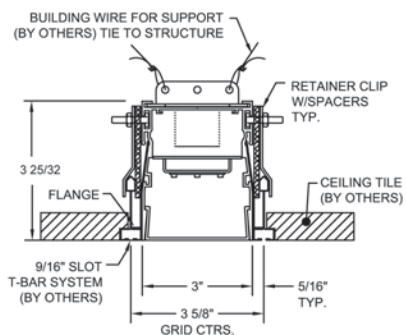


Hard Ceiling Mount


Gyp type ceiling with cover flange:
Specify **GFR** code in catalog #

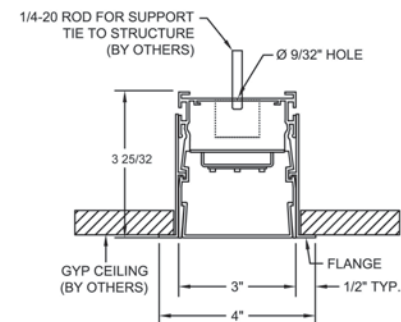

Gyp type ceiling Mud Flange:
Specify **GMR** code in catalog #

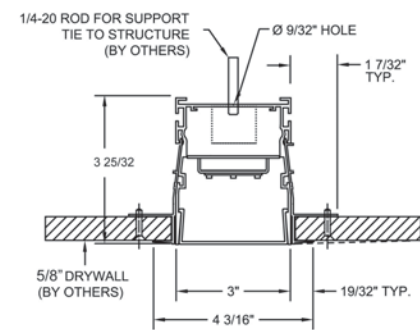

Undetermined ceiling, Flangeless:
Specify **NFR** code in catalog #

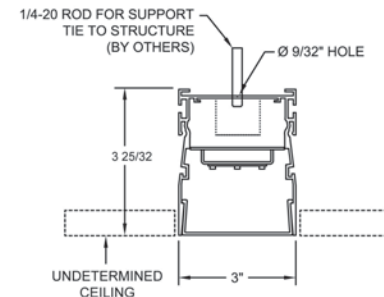


*Contractor must provide dimensions to Gammalux.

Gammalux Lighting Systems reserves the right to change the details of fixture design and construction at any time.


Mud Flange Detail



Fixture ships with steel spacer bracket to maintain aperture integrity during installation.

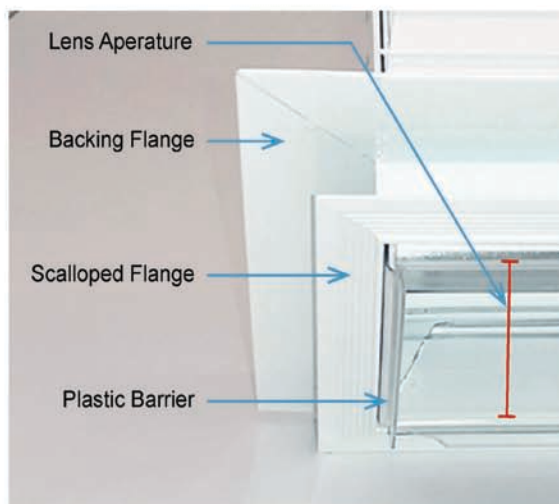

Mud flange assembly consists of a backing flange and scalloped flange. Plastic barriers protect the integral expansion gap from mud and paint.

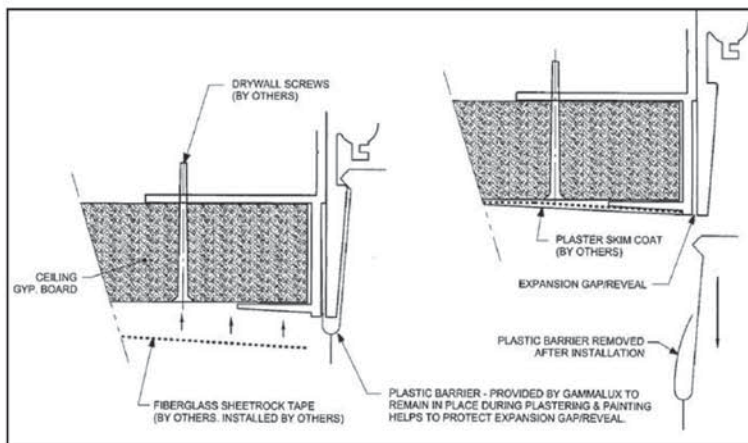

Gyp material is embedded between the backing flange and scalloped flange, then drywall screws secure the drywall to the backing flange. Fiberglass tape, skim coat of plaster and paint are added on top of the scalloped flange with the plastic barrier installed throughout all procedures. After paint is dry, plastic barrier is removed, revealing clean expansion gap.



Sample Installations




Flush with 15/16" grid (T1W)



Modified per spec



Dropped with tegular tiles in 9/16" grid (T9TW)

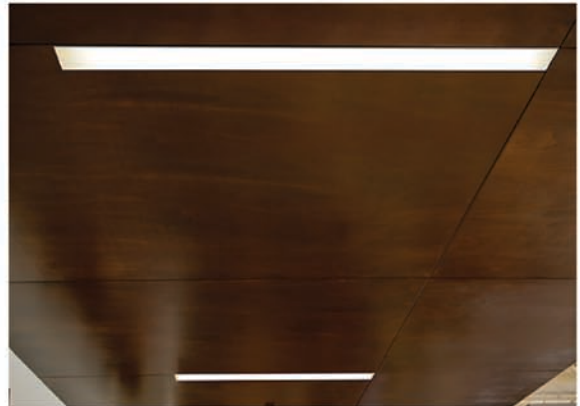


No flange (NFR)



Gyp flange (GFR)



Mud flange (GMR)

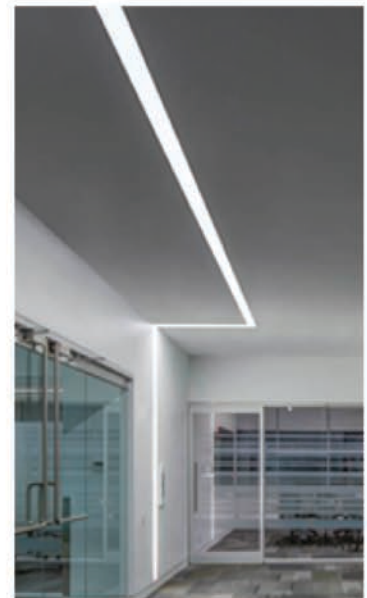

Mud flange (GMR)

Custom Programmed Output

Custom Programmed Output can be specified to produce approximate Delivered Lumens per Foot, Percentage of High Output Value or Maximum Watts per Foot.

Delivered Lumens Per Foot

Gammalux deals only in delivered lumens per foot. When working to match or exceed a competitor product's Lumens Per Foot package, be sure you are looking at their Delivered (through the lens) lumens per foot, not their System (bare board) lumens per foot.

In the Gammalux item #, use C as the Output designator and add a fixture description stating the required Lumens Per Foot value (ie: if you need 600 lumens per foot delivered by the fixture, the line note would read "Program = 600 LPF").

Percentage of High Output Value

If the required delivered lumens per foot are not known, run lighting calculations using our High Output IES file and identify the percentage of decrease required to produce the correct lighting in the space.

In the Gammalux item #, use C as the Output designator and add a fixture description stating the required percentage of decrease from our High Output value (ie: for 60% of our High Output value, the line note would read "Program = 60% of High Output").

Maximum Watts Per Foot

In the Gammalux item #, use C as the Output designator and add a fixture description stating the required Maximum Watts per Foot (ie: if you need the fixtures capped at a maximum of 7 watts per foot, the line note would read "Program = 7 WPF").

For all three methods, custom programming capability is currently 50-99% of our High Output value. For requirements outside of this range, consult factory.