





Click or scan QR code to view latest spec sheet

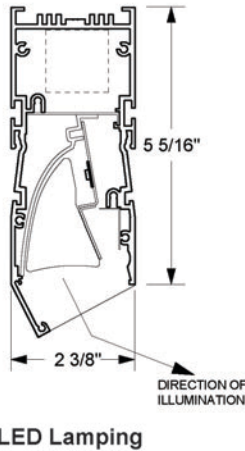

LED Lamping

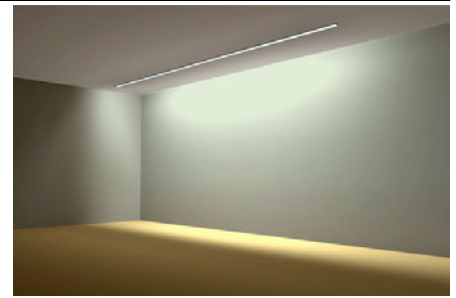

Click photo to view product page

Page 1: Overview & Nomenclature  
Pages 2-3: Specifications  
Pages 4-5: Photometric Info / Downloads  
Page 6: Mounting Details  
Page 8: Mud Flange Detail  
Pages 9-12: Application Guide & CPO

Revision Date: April 18, 2025  
Gammlux Lighting Systems reserves the right to change details of fixture designs and construction at any time.

**Product Overview** (for complete specifications, see pages 2 & 3) \*\*\*\*\*NEW\*\*\*\*\* See last page for **APPROVED CUT RELEASE**.

**Quick Ship:** Most product options are shippable within 2-3 weeks! Check our **Quick Ship Guide** for details.

**Construction:** I.C. rated. BABA, ARRA, RoHS, REACH and Prop 65 compliant. Extruded aluminum housing for superior fit and finish. Grid mounted version can be installed from below. Runs and patterns can be built to field dims., including fully illuminated corners.

**Unbroken Illumination:** Continuous illumination in custom-length runs and patterns with illuminated corners.

**Electrical:** LED components by major manufacturers, may be upgraded in the field to increase energy efficiency. Fixtures can be fitted with specialty LED and control components (consult factory). Standard Output, High Output and Custom Output options available.

**Optical:** LEDs are not visible at any angle. Optional white semi-gloss internal baffle reduces inline glare and striations on adjacent wall.

## Standard Nomenclature

<b>Quick Ship Eligible</b> Most options 2-3 weeks		<b>Output</b>		<b>Driver</b>		<b>Ceiling Interface</b>		<b>Paint Colors</b>		<b>Paint Finish</b>	
		S Standard Output H High Output C Custom Output (see addendum page)		ZTV10 0-10V Dim to 10% ZTV1 0-10V Dim to 1% For all options, see next page		GFR Gyp w/ .5" cover flange GMR Gyp w/ mud flange NFR No flange or interface T1W 15/16" flat grid w/ flat tiles T1TW 15/16" flat grid w/ tegular tiles T9W 9/16" flat grid w/ flat tiles T9TW 9/16" flat grid w/ tegular tiles TSW 9/16" slot grid Consult factory for all others.		W White (See color chart for other colors) CCM Custom Color Match For wood finishes, see addendum page		H High Gloss SG Semi-Gloss	
<b>Manufacturer</b> Gammlux		<b>Color Temp. (nom)</b> 27 2700K 50 5000K 30 3000K RGB* 35 3500K RGBW_ _ _ * 40 4000K		<b>Length Option</b> S Specific N Nominal (Nominal is recommended for grid mount)							
<b>Cross Section (nom)</b> 2" x 5"											
<b>GB25WWRC</b> - <b>ASYSL358</b> - <b>UNIV</b> - <b>ZTV10</b> - <b>4'N</b> - <b>REC/XXXX</b> - <b>OP</b> - <b>WSG</b> -		<b>CRI**</b> 8 for 80+ 9 for 90+		<b>Run or Pattern</b> Specify total run length (i.e. 43' 5 1/8") For illuminated patterns, follow overall length with L, T, X, U, RECT or SQ. Examples: 23'6" x 17'2" L Pattern would be 41'LPTTN. 12' x 12' Square Pattern would be 48'SQPTTN. Provide leg dimensions as a line note in the spec.		<b>Mounting</b> REC Recessed in ceiling. Consult factory for in-wall.				<b>Options</b> BPE Battery Pack (4' section) DL UL Damp Label EMERG Emergency Ckt 2CKT Dual Circuiting <b>Shielding</b> DC Dust Cover, Clear EBBWSG End Blade Baffle (2' each end), White Semi-Gloss FBBWSG Full-length Blade Baffle, White Semi-Gloss OP Open	
<b>Housing</b> RC Recessed <b>Distribution</b> Wall Wash		<b>Lamp</b> <b>Voltage</b> LED 120V, 277V, UNIV									
<b>Series</b> Beam		<b>Lamp Configuration</b> ASY Asymmetric									

\*\* 90+ CRI increases watts nom. 14.5%. # Sensor by Others (consult factory).

\*Some restrictions apply. Check our Quick Ship Guide for details.

## Specifications (continued on next page)

### Electrical

**Output:** Standard (**S**) and high (**H**) options deliver a pre-set lumen package (see chart below). Custom-programmed output (**C**) is specified as LPF, WPF or % of High Output (see Custom Programmed Output page).

**Static Driver:** eldoLED [Optotronic](#)\* programmable driver, wired for static operation (**DVR**).

**0-10V Dimming:** eldoLED [Optotronic](#)\* programmable driver, wired for 0-10v control and dimming to 10% (**ZTV10**) or to 1% (**ZTV1**).

**Step Dimming:** Generic step dimming driver, two hot inputs for 100% and 50% output (**SD2**).

**DALI Dimming:** Generic DALI driver with two loose control wires exiting fixture at power feed location (**DALI**).

**Lutron Dimming:** [Hi-Lume](#) dim to 1% EcoSystem with Soft-On, Fade-to-Black (**LDE1**).

**White Emitter:** Nichia 757G emitters\* binned within 3 MacAdam ellipses in Osram or Gammalux proprietary array. 90+ CRI option with extended lead time (CRI code **9**) results in nominal 14.5% drop in efficacy; increase calculated watts 14.5%.

**Battery Pack:** Bodine [BSL10T3](#)\* (**BPE**). 4W max input, 10W initial output, delivers min. 27% of High Output value per 4' length.

**LED System:** 70% lumen output (L70) at max 85 degrees C calculated at >60k hours. Fixtures are shipped with anti-static gloves to minimize the risk of damage to LEDs during installation. [5 year limited warranty](#).

**Sensors:** Sensors are as specified, confirmed by Gammalux prior to factory quote. Examples are Enlighted [Micro Sensor](#), Lutron [Athena Wireles Node](#), Lutron [Vive](#), Wattstopper [FS-205](#).

**Upgrade Capability:** LED assemblies can be replaced in the future with the latest factory-provided and fully warranted components. On-board sensors, control interface devices and alternate LED components may be specified (consult factory). Fixtures bear UL & cUL Dry Location label. Damp Location label available (**DL**).

\*Subject to availability; may be substituted by Gammalux. Components and specifications may be changed without notice.

LUMENS AND WATTS BY OUTPUT OPTION AND LED COLOR @ 80+ CRI*											
STANDARD OUTPUT LED						HIGH OUTPUT LED					
OPEN APERTURE (OP) DELIVERS: <b>364.6 LPF</b>						OPEN APERTURE (OP) DELIVERS: <b>485.8 LPF</b>					
CCT	2700 K	3000 K	3500 K*	4000 K	5000 K	CCT	2700 K	3000 K	3500 K*	4000 K	5000 K
WATTS / FT.	6.3	5.9	5.8	5.7	5.4	WATTS / FT.	8.6	8.2	8	7.8	7.4
*IES FILES WERE CREATED USING 3500K DIODES @80+ CRI. WATTAGE IS MULTIPLIED BY 1.08 FOR 2700K, 1.02 FOR 3000K, .98 FOR 4000K AND .93 FOR 5000K DIODES TO MAINTAIN THE SAME DELIVERED LUMENS THROUGHOUT ALL COLOR TEMPERATURES. FOR 90+ CRI, INCREASE WATTAGE BY 14.5%. SEE ADDENDUM FOR CUSTOM PROGRAMMING.											

### Construction

**Housing:** I.C. rated. BABA, ARRA, RoHS, REACH and Prop 65 compliant. Extruded aluminum body 2.00" wide x 5.00" high, 6063T5, 0.070" min thickness. Each housing is 12' max unless longer housings are pre-coordinated with the factory to reduce joints and installation labor. Fixtures are built per approved factory drawings and tested as a complete system at the factory. Continuous runs and [patterns](#) are ordered, built and shipped with a single item #. Fixtures ordered as individuals are not designed to be joined together in the field.

**Joiner System:** Automatic alignment, no loose parts, one tool to tighten factory installed bolts for hairline seam.

**Lamping:** Patterns are fully illuminated. Runs ordered in Specific Length (Length Option **S**) will be built to the exact dimension shown on signature-approved shop drawings. Runs ordered in Nominal Length (Option **N**) may be factory-adjusted to accommodate standard mounting positions or grid centers. Factory drawings will show all dimensions of mounting and power feed locations. Fixtures built to less than 4' may require remote driver installation - consult factory.

**Mounting:** Recessed into a ceiling system (**REC**). Fixtures surrounded by grid should be ordered in Nominal length (Length Option **N**) and can be installed from below. Consult factory for in-wall installation. Mud flange (**GMR**) includes integral expansion gap to allow for heat expansion with no pressure on surrounding plaster. GMR FIXTURE MUST BE INSTALLED PRIOR TO GYP. Gammalux recommends mounting no less than 18" from the object wall.

## Specifications (continued)

### Optical

**Reflector:** Shall be asymmetric extruded aluminum painted high reflectance white.

**Dust Cover:** Clear acrylic dust cover, snap-in fitting (**DC**). Multiply delivered lumens by .97.

**Internal Baffle:** Optional, field removable baffle shall be formed steel, painted white semi-gloss (**EBBWSG** or **FBBWSG**). Multiply delivered lumens by .90.

### Finish

Acid etched or clear anodized housing electrostatically sprayed with high solids aliphatic two component polyurethane high (**H**) or semi-gloss (**SG**) to an avg. thickness of 2 mils. Unless specified otherwise, cable mount canopies are white semi-gloss and all other painted mounting components match the fixture finish. Custom finish, consult factory. Wood Finishes, back page.

#### High Gloss Finish



White (WH)




Red (RH)



Yellow (YH)



Green (GH)



Blue (BH)



Black (BKH)

#### Semi Gloss Finish



White (WSG)




Silver (SSG)



Gray (GYSG)



Off White (OWSG)



Light Gray (LGYSG)



Bronze (BZSG)



Satin Aluminum (SAPSG)



Black (BKSG)

### Packing and Shipping

Fixtures built for continuous rows and patterns are given a specific location identifier, clearly identified on factory layout drawings, the fixture's ID Label, protective wrapping and on each end of fixture carton. Shipping pallets are built with 2" clearance, extending beyond the length and width of cartons, providing shipping protection.

Approx. weight of 4' module is 17 lbs. including carton. Weight of pallet and supplemental packing materials not factored in.

### Internal Blade Baffle

Fixtures built with no internal baffle (**OP** or **DC**) may create lateral glare for viewers in a corridor and striations on adjacent walls in a wall-to-wall installation.

Internal 2' end baffle (**EBBWSG**) provides lateral cu


Photometric Reports for  
**STANDARD OUTPUT FIXTURES**

**FIXTURE USES OPEN APERTURE AND 3500 K BOARDS. @ 80+ CRI**

IESNA: LM 79-2008  
ISSUEDATE: 1/31/2017  
TEST: GB25WWRC1SL358-4.IES  
TESTLAB: PLI ENTERPRISES INC  
MANUFAC: GAMMALUX LIGHTING SYSTEMS  
LUMCAT: GB25WWRC-1SL358-OP  
LAMPS: PLPG2-BAR-1100-835-289X38-DC

EFFICACY (Total): 68.7 LPW  
DISTRIBUTION % UP: 4.8%  
DISTRIBUTION % DOWN: 95.2%  
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR  
Width: 4.00 (Feet)  
Length: 0.17  
Height: 0.50  
INPUT WATTS: 25.4

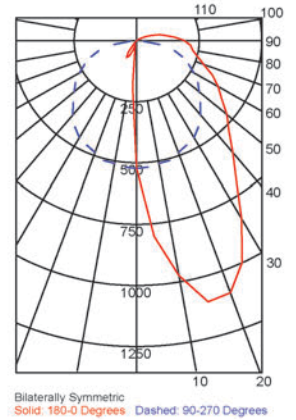


Photometric Reports for  
**HIGH OUTPUT FIXTURES**

**FIXTURE USES OPEN APERTURE AND 3500 K BOARDS. @ 80+ CRI**

IESNA: LM 79-2008  
ISSUEDATE: 1/31/2017  
TEST: GB25WWRC1HL358-4.IES  
TESTLAB: PLI INTERPRISES INC  
MANUFAC: GAMMALUX LIGHTING SYSTEMS  
LUMCAT: GB25WWRC-1HL358-120V-DVR-4'N-OP  
LAMPS: 96 WHITE LEDS

EFFICACY (Total): 61.8 LPW  
DISTRIBUTION % UP: 4.8%  
DISTRIBUTION % DOWN: 95.2%  
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR  
Width: 4.00 (Feet)  
Length: 0.17  
Height: 0.50  
INPUT WATTS: 37.6

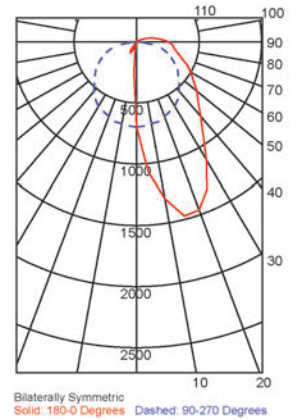




## Mounting Details


**Factory Drawings:** Fully dimensioned factory drawings will be provided upon receipt of purchase order.

### Grid Mount


**15/16" Flat TBar:**  
Specify **T1W** code in catalog #

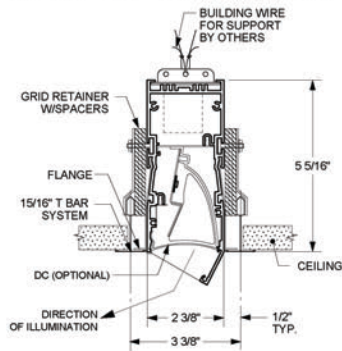


**9/16" Flat TBar:**  
Specify **T9W** code in catalog #

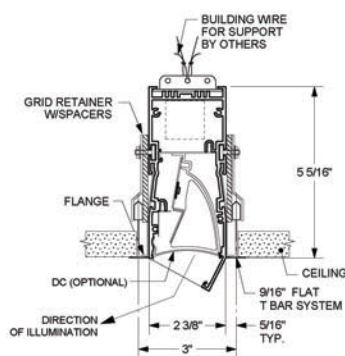


**15/16" Flat TBar with Tegular Tiles:**  
Specify **T1TW** code in catalog #

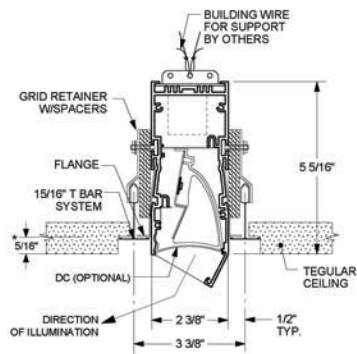

**9/16" Flat TBar with Tegular Tiles:**  
Specify **T9TW** code in catalog #

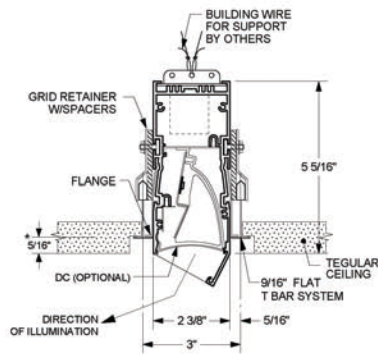


**9/16" Slot Grid:**  
Specify **TSW** code in catalog #

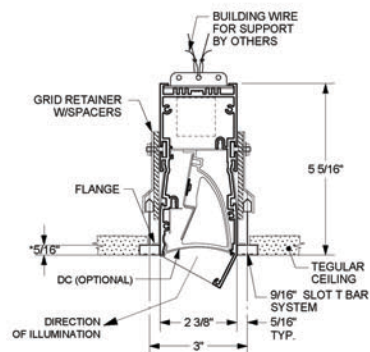


### Hard Ceiling Mount


**Gyp type ceiling with cover flange:**  
Specify **GFR** code in catalog #



**Gyp type ceiling, Flangeless (mud flange):**  
Specify **GMR** code in catalog #

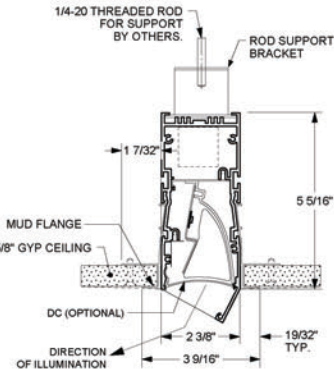

**Undetermined ceiling, Flangeless:**  
Specify **NFR** code in catalog #

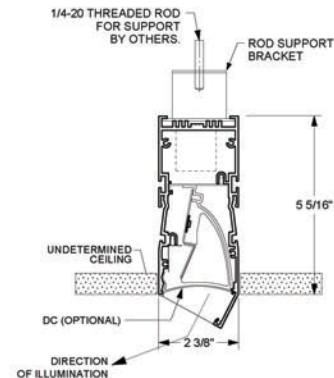


Gammalux Lighting Systems reserves the right to change the details of fixture design and construction at any time.


## Mud Flange Detail



Fixture ships with steel spacer bracket to maintain aperture integrity during installation.

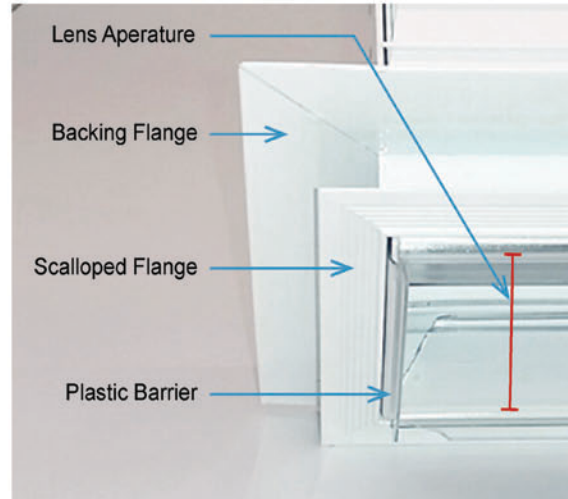

Mud flange assembly consists of a backing flange and scalloped flange. Plastic barriers protect the integral expansion gap from mud and paint.

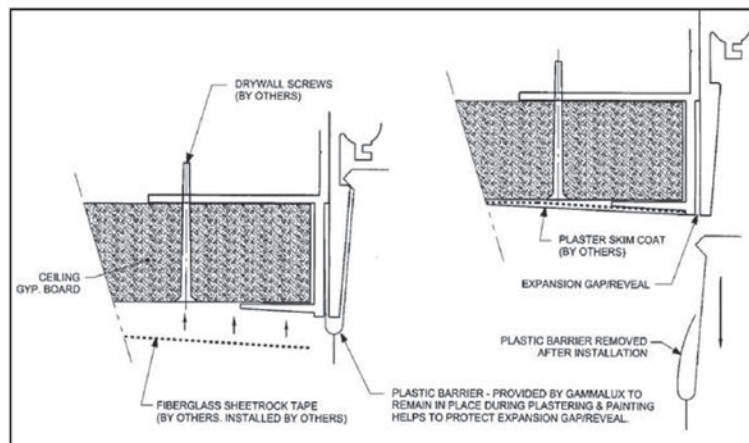

Gyp material is embedded between the backing flange and scalloped flange, then drywall screws secure the drywall to the backing flange. Fiberglass tape, skim coat of plaster and paint are added on top of the scalloped flange with the plastic barrier installed throughout all procedures. After paint is dry, plastic barrier is removed, revealing clean expansion gap.



## Application Guide


The images on this page depict several typical installations and the resulting light levels as calculated in a computer model scenario.

Examples are of a 16' installation centered on a 24' wall. Reflectivity assumptions are: ceiling 80%, walls 50%, floor 20%. The values represented are the footcandle levels obtained in the horizontal center of the wall. The fixture is using High Output LED boards with 3500K diodes.

Although the LED boards are hidden from view, the inside of the fixture is bright. This will be visible to room occupants positioned between the fixture and the wall.

Example:

- In a 7' ceiling with the fixture mounted 36" from the wall, the user obtains an average of 34fc with a max of 44 and a min of 23.

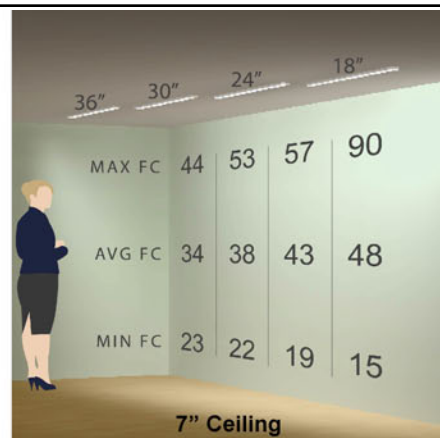

Example:

- In a 9' ceiling with the fixture mounted 30" from the wall, the user obtains an average of 30fc with a max of 53 and a min of 13.



Example:

- In an 11' ceiling with the fixture mounted 30" from the wall, the user obtains an average of 28fc with a max of 53 and a min of 9.





---

## Custom Programmed Output

---

**Custom Programmed Output** can be specified to produce approximate Delivered Lumens per Foot, Percentage of High Output Value or Maximum Watts per Foot.

### Delivered Lumens Per Foot

Gammalux deals only in delivered lumens per foot. When working to match or exceed a competitor product's Lumens Per Foot package, be sure you are looking at their Delivered (through the lens) lumens per foot, not their System (bare board) lumens per foot.

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required Lumens Per Foot value (ie: if you need 600 lumens per foot delivered by the fixture, the line note would read "Program = 600 LPF").

### Percentage of High Output Value

If the required delivered lumens per foot are not known, run lighting calculations using our High Output IES file and identify the percentage of increase or decrease required to produce the correct lighting in the space.

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required percentage of decrease from our High Output value (ie: for 60% of our High Output value, the line note would read "Program = 60% of High Output").

### Maximum Watts Per Foot

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required Maximum Watts per Foot (ie: if you need the fixtures capped at a maximum of 7 watts per foot, the line note would read "Program = 7 WPF").

For all three methods, custom programming capability is currently 25-200% of our High Output value. For requirements outside of this range, consult factory.

## Wood Finishes


Fixture housings are powder coated with a base finish, baked, then wrapped in a film with the decorative grain pattern. Baking the housing again allows the grain to become embedded into the powder coated finish. This is not a decal or veneer. Additional lead time and cost increases apply. Consult factory for pricing. Swatches are 3" x 4".



FINISH CODE: KPI



FINISH CODE: MED

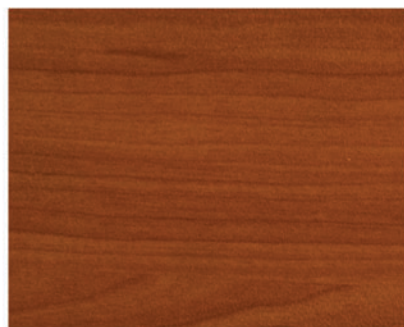


FINISH CODE: HCH




FINISH CODE: WAL




FINISH CODE: AOK

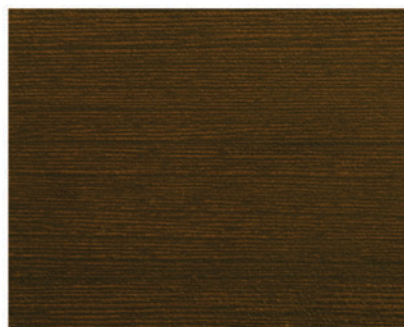

FINISH CODE: FWG

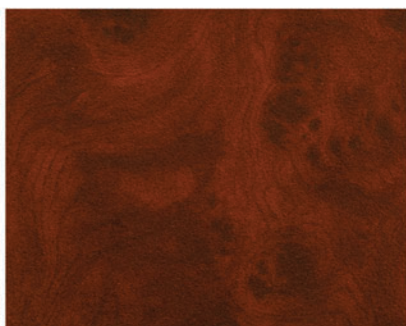

FINISH CODE: MH1

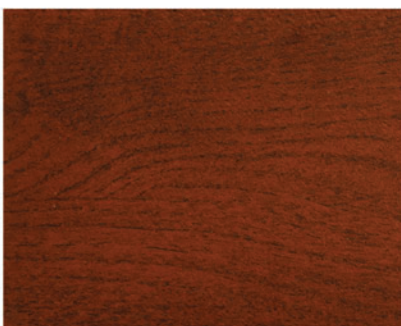

FINISH CODE: MH2

**DUE TO VARIANCES IN MONITORS AND PRINTERS, ACTUAL FINISHES MAY APPEAR DIFFERENT FROM SWATCHES.**

### Approved Cut Release option

---

If offered for Approved Cut Release in the Gammalux factory quote, the product in the accompanying purchase order is authorized by the GC to be released to production without the need for factory drawings for approval.

I confirm that:

- all ordering options are clearly noted (highlighted, boxed, written in, etc.) on page 1 of this fixture cut sheet
- quoted leadtime begins upon Gammalux's confirmation that the P.O. and marked cut sheet match their quote.
- the order will be released to production and a "record only" drawing will be provided prior to product shipment
- changes after Gammalux's release to production will result in a minimum 25% change fee which increases as production progresses.

General Contractor \_\_\_\_\_

GC's authorized Signature (or stamp below) \_\_\_\_\_

Signatory's printed name \_\_\_\_\_