




Click or scan QR code to view latest spec sheet



Click photo to view product page
Page 1: Overview & Nomenclature
Pages 2-3: Specifications
Pages 4-5: Photometric Info / Downloads
Page 6: Mounting Details
Pages 8-10: Custom Programming & Cable and Endcap Photos

Revision Date: April 18, 2025
Gammalux Lighting Systems reserves the right to change details of fixture designs and construction at any time.

LED Lamping

Product Overview (for complete specifications, see pages 2 & 3) *****NEW***** See last page for **APPROVED CUT RELEASE**.

Construction: BABA, ARRA, RoHS, REACH and Prop 65 compliant. Extruded aluminum housing for superior fit and finish. Runs and patterns have a single item # and can be built to field dims.

Electrical: LED components by major manufacturers, may be upgraded in the field to increase energy efficiency. Fixtures can be fitted with specialty LED and control components (consult factory). Standard Output, High Output and Custom Output options available.

Optical: Wide indirect distribution. Upper lens reduces shadows and eliminates striations on ceiling and walls. Lower lens available in standard diffusion only.

Standard Nomenclature

Manufacturer		Color Temp. (nom)		Driver Option		Length Option		Side Shielding		Paint Colors		Paint Finish	
Gammalux		27 2700 K		DVR Static Driver		N Nominal length		SS Solid Side Panels		W White		H High Gloss	
Series		30 3000 K		For Dimming Options,		S Specific length		Upper Shielding		(Consult Color Chart for other standard colors)		SG Semi-Gloss	
Transition		35 3500 K		See Page 2				APL Acrylic Linear Prismatic Lens		CCM Custom Color Match			
Product		40 4000 K											
Archway		50 5000 K											
		RGB** (select output code S)											
Cross Section (nom)				Voltage									
9" x 2"				120, 277, UNIV									
GTAW92BF		2SL358		120V		DVR		5' N		C24"		APL/SS/ASL	
Shape		CRI		Run Length		Suspension Length		Mounting Method		Lower Shielding		Options	
Wave		8 for 80+ 9 for 90+		Specify total run length (i.e. 43' 5 1/8", etc). Single-piece housing max in 12' unless coordinated with factory.		24" (ceiling to top of fixture)		C Straight Cable YC Inverted Y Cable		ASL Acrylic Satin Lens, White		BPE Battery Pack EM. Kit CP Chicago Plenum compliant DL UL Damp Label EMERG Emergency ckt. GLR Fuse w/holder 2CKT Dual Circuiting	
End Detail		Lamp Type											
Full Profile		LED											
Slim Profile													
Distribution		Output											
Bi-Directional		S Standard Output (If RGB, select S) H High Output C Custom-Programmed Output											
LED Arrays in X-Sec													
1 (White)													
2 (White or RGB)													

** 90+ CRI increases watts nom. 14.5%. # Sensor by Others (consult factory).

Specifications (continued on next page)

Electrical

Output: Standard (**S**) and high (**H**) options deliver a pre-set lumen package (see chart below). Custom-programmed output (**C**) is specified as LPF, WPF or % of High Output (see Custom Programmed Output page).

Static Driver: eldoLED [Optotronic](#)* programmable driver, wired for static operation (**DVR**).

0-10V Dimming: eldoLED [Optotronic](#)* programmable driver, wired for 0-10v control and dimming to 10% (**ZTV10**) or to 1% (**ZTV1**).

Step Dimming: Generic step dimming driver, two hot inputs for 100% and 50% output (**SD2**).

DALI Dimming: Generic DALI driver with two loose control wires exiting fixture at power feed location (**DALI**).

Lutron Dimming: [Hi-Lume](#) dim to 1% EcoSystem with Soft-On, Fade-to-Black (**LDE1**).

White Emitter: Nichia 757G emitters* binned within 3 MacAdam ellipses in Osram or Gammalux proprietary array. 90+ CRI option with extended lead time (CRI code **9**) results in nominal 14.5% drop in efficacy; increase calculated watts 14.5%.

Battery Pack: Bodine [BSL10T3](#)* (**BPE**). 4W max input, 10W initial output, delivers min. 27% of High Output value per 4' length.

LED System: 70% lumen output (L70) at max 85 degrees C calculated at >60k hours. Fixtures are shipped with anti-static gloves to minimize the risk of damage to LEDs during installation. [5 year limited warranty](#).

Sensors: Sensors are as specified, confirmed by Gammalux prior to factory quote. Examples are Enlighted [Micro Sensor](#), Lutron [Athena Wireles Node](#), Lutron [Vive](#), Wattstopper [FS-205](#).

Upgrade Capability: LED assemblies can be replaced in the future with the latest factory-provided and fully warranted components. On-board sensors, control interface devices and alternate LED components may be specified (consult factory). Fixtures bear UL & cUL Dry Location label. Damp Location label available (**DL**).

*Subject to availability; may be substituted by Gammalux. Components and specifications may be changed without notice.

LUMENS AND WATTS BY OUTPUT OPTION AND LED COLOR @ 80+ CRI*											
STANDARD OUTPUT LED						HIGH OUTPUT LED					
STANDARD DIFFUSED LENS (ASL) DELIVERS: 1080.9 LPF						STANDARD DIFFUSED LENS (ASL) DELIVERS: 1441.2 LPF					
CCT	2700 K	3000 K	3500 K*	4000 K	5000 K	CCT	2700 K	3000 K	3500 K*	4000 K	5000 K
WATTS / FT.	12.6	11.8	11.6	11.4	10.8	WATTS / FT.	17.2	16.4	16	15.6	14.8
*IES FILES WERE CREATED USING 3500K DIODES @80+ CRI. WATTAGE IS MULTIPLIED BY 1.08 FOR 2700K, 1.02 FOR 3000K, .98 FOR 4000K AND .93 FOR 5000K DIODES TO MAINTAIN THE SAME DELIVERED LUMENS THROUGHOUT ALL COLOR TEMPERATURES. FOR 90+ CRI, INCREASE WATTAGE BY 14.5%. SEE ADDENDUM FOR CUSTOM PROGRAMMING.											

Construction

Housing: BABA, ARRA, RoHS, REACH and Prop 65 compliant. Extruded aluminum body 9.00" wide x 1.75" high, 6063T5, 0.070" min thickness. Each housing is 8' max unless longer housings are pre-coordinated with the factory to reduce joints and installation labor. Individual fixtures can be 9' OAL. Fixtures are built per approved factory drawings and tested as a complete system at the factory. Continuous runs and [patterns](#) are ordered, built and shipped with a single item #. Fixtures ordered as individuals are not designed to be joined together in the field.

Joiner System: Automatic alignment, no loose parts, one tool to tighten factory installed bolts for hairline seam. No light leaks.

Lamping: Runs ordered in Specific Length (Length Option **S**) will be built to the exact dimension shown on signature-approved shop drawings. Runs ordered in Nominal Length (Option **N**) may be factory-adjusted to accomodate standard mounting positions or grid centers. Factory drawings will show all dimensions of mounting and power feed locations. Fixtures built to less than 4' may require remote driver installation - consult factory. End detail extends 6" past suspension assembly. 6" end details add 1' to the overall run length.

Mounting: Straight aircraft (**C**) cable is 7 x 7 stranded stainless steel with machined stainless steel stopper fitting at the top end. Lower end strands are welded and ground for easy insertion into adjustable cable gripper. Inverted Y aircraft cable (**YC**) is 7 x 7 stranded stainless steel with adjustable cable gripper at the top end. Transitions to inverted Y configuration, the angle of which being consistent with housing side angles. Feed cord straight, white 3/C SVT or SJT #18 AWG. Stems are 3/8" schedule 40 pipe with top swivels (**S**). California UBC compliant stems with internal safety cables (**SEQ**).

Specifications (continued)

Optical

LED Diffusing Lens: Snap-in. Shall be 90% DR semi-clear acrylic (**LDC**).

Acrylic Satin Lens: Snap-in. Shall be 100% DR acrylic (**ASL**).

Finish

Acid etched or clear annodized housing electrostatically sprayed with high solids aliphatic two component polyurethane high (**H**) or semi-gloss (**SG**) to an avg. thickness of 2 mils. Unless specified otherwise, cable mount canopies are white semi-gloss and all other painted mounting components match the fixture finish. Custom finish, consult factory.

High Gloss Finish



White (WH)



Red (RH)



Yellow (YH)



Green (GH)



Blue (BH)



Black (BKH)


Semi Gloss Finish



White (WSG)




Silver (SSG)




Gray (GYSG)



Off White (OWSG)



Light Gray (LGYSG)



Bronze (BZSG)



Satin Aluminum (SAPSG)



Black (BKSG)

Packing and Shipping

Fixtures built for continuous rows and patterns are given a specific location identifier, clearly identified on factory layout drawings, the fixture's ID Label, protective wrapping and on each end of fixture carton. Shipping pallets are built with 2" clearance, extending beyond the length and width of cartons, providing shipping protection.

Approx. weight of 4' module is 22 lbs. including carton. Weight of pallet and supplemental packing materials not factored in.

Photometric Reports for
STANDARD OUTPUT FIXTURES

FIXTURE USES LENS ASL AND 3500 K BOARDS. @ 80+CRI


IESNA: LM 79-2008
ISSUEDATE: 05/01/2014
TEST: 1 MOD TO 2016 COMP
TESTLAB: Photopia 3.2.6
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GTAW92B-2SL358-APLSS/ASL
LAMPS: Gammalux proprietary LED array 3500K

EFFICACY (Total): 84.4 LPW**
DISTRIBUTION % UP: 67.0%
DISTRIBUTION % DOWN: 32.9%
CIE CLASSIFICATION: BI-DIRECTIONAL

LUMINOUS OPENING: RECTANGULAR
Width: 0.75 (Feet)
Length: 5.33
Height: 0.19
INPUT WATTS: 51.2



Acrylic Satin Lens
(ASL)

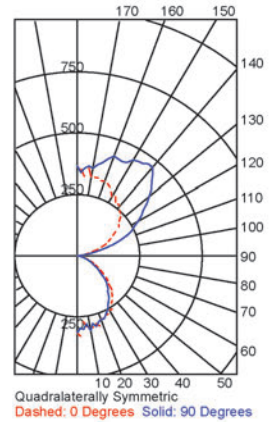

**Photometric Reports for
HIGH OUTPUT FIXTURES**

FIXTURE USES LENS ASL AND 3500 K BOARDS. @ 80+CRI


IESNA: LM-63-2002
ISSUEDATE: 10/22/13
TEST: ITL79416 MOD TO 2016 COMPONENTS
TESTLAB: Photopia 3.2.6
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GTAW92B-2HOLED35-APL/SS/ASL
LAMPS: Gammalux proprietary LED array 3500K

EFFICACY (Total): 56.63 LPW**
DISTRIBUTION % UP: 58.1%
DISTRIBUTION % DOWN: 41.9%
CIE CLASSIFICATION: BI-DIRECTIONAL

LUMINOUS OPENING: RECTANGULAR
Width: 0.75 (Feet)
Length: 5.33
Height: 0.19
INPUT WATTS: 71.2




Acrylic Satin Lens
(ASL)

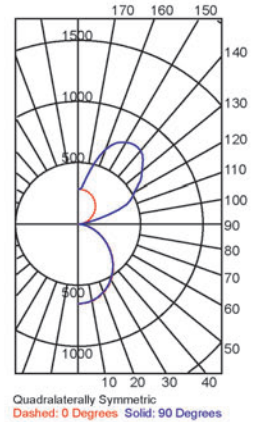


Mounting Details

Factory Drawings: Fully dimensioned factory drawings will be provided upon receipt of purchase order.


Cable Mount:
Specify **C** code in catalog #

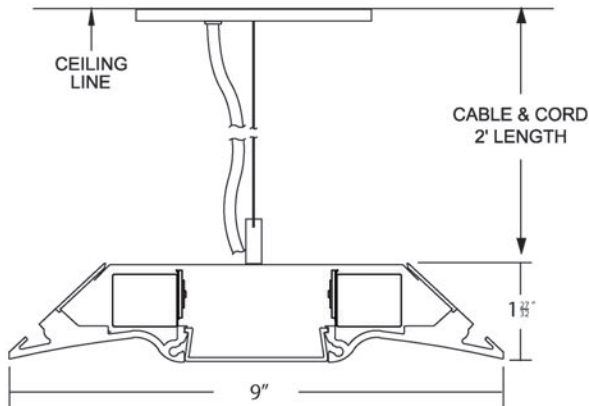


Inverted Y Cable Mount:
Specify **Y** code in catalog #

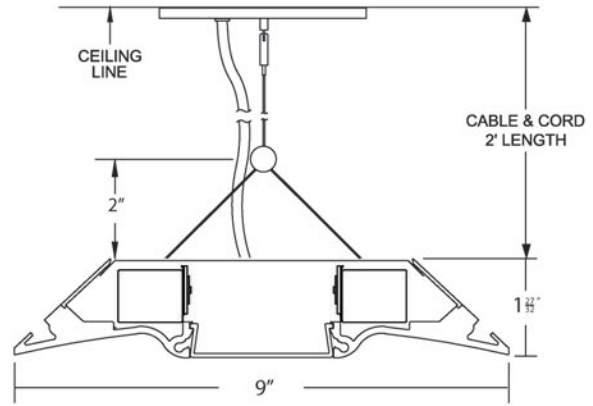

Swivel Stem Mount:
Specify **S** code in catalog #

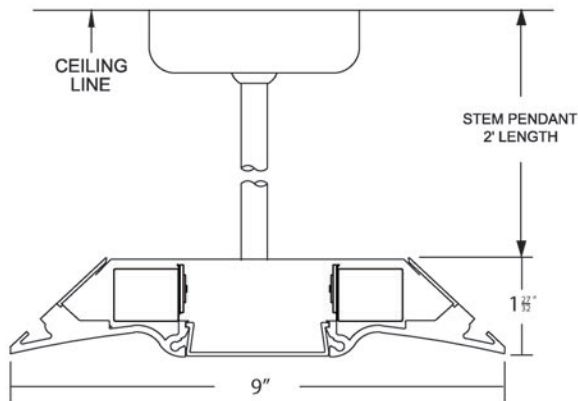

CA Earthquake Stem Mount:
Specify **SEQ** code in catalog #

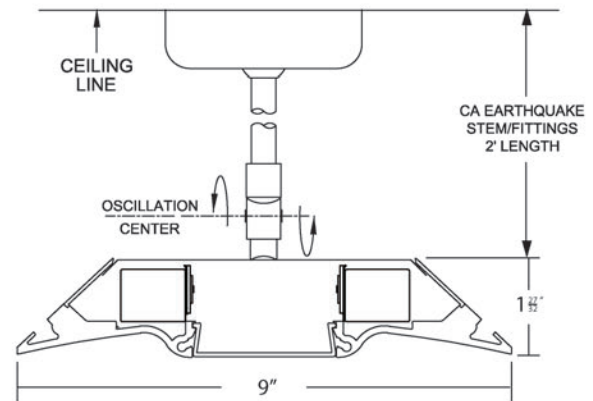

6" END CAPS ADD 1' TO THE OVERALL RUN LENGTH. FOR A 12' ILLUMINATED INDIVIDUAL WITH CABLES ON 8' CENTERS, SPECIFY A 13' FIXTURE. 24' OF ILLUMINATION SHOULD BE SPECIFIED AS 25', ETC.

GAMMALUX LIGHTING SYSTEMS RESERVES THE RIGHT TO CHANGE DETAILS OF FIXTURE DESIGN AND CONSTRUCTION AT ANY TIME.

Gammalux Lighting Systems reserves the right to change the details of fixture design and construction at any time.

Custom Programmed Output

Custom Programmed Output can be specified to produce approximate Delivered Lumens per Foot, Percentage of High Output Value or Maximum Watts per Foot.

Delivered Lumens Per Foot

Gammalux deals only in delivered lumens per foot. When working to match or exceed a competitor product's Lumens Per Foot package, be sure you are looking at their Delivered (through the lens) lumens per foot, not their System (bare board) lumens per foot.

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required Lumens Per Foot value (ie: if you need 600 lumens per foot delivered by the fixture, the line note would read "Program = 600 LPF").

Percentage of High Output Value

If the required delivered lumens per foot are not known, run lighting calculations using our High Output IES file and identify the percentage of increase or decrease required to produce the correct lighting in the space.

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required percentage of decrease from our High Output value (ie: for 60% of our High Output value, the line note would read "Program = 60% of High Output").


Maximum Watts Per Foot

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required Maximum Watts per Foot (ie: if you need the fixtures capped at a maximum of 7 watts per foot, the line note would read "Program = 7 WPF").

For all three methods, custom programming capability is currently 25-200% of our High Output value. For requirements outside of this range, consult factory.

Cable and Endcap Photos

Cable Mount: Photos

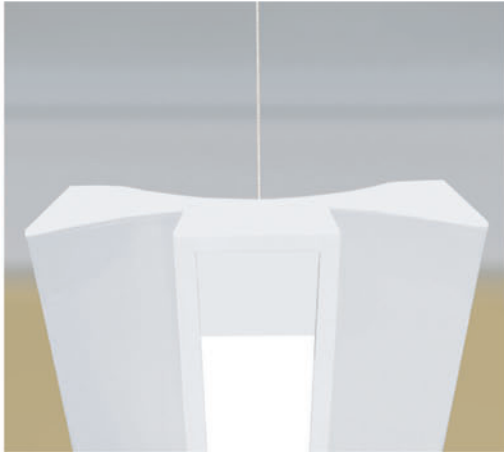

End view with Full Profile End Detail



Angle view with Full Profile End Detail

Inverted Y Cable: Photos



End view with Slim Profile End Detail



Angle view with Slim Profile End Detail

6" END CAPS ADD 1' TO THE OVERALL RUN LENGTH.
FOR A 12' ILLUMINATED INDIVIDUAL WITH CABLES
ON 8' CENTERS, SPECIFY A 13' FIXTURE. 24' OF
ILLUMINATION SHOULD BE SPECIFIED AS 25', ETC.

GAMMALUX LIGHTING SYSTEMS
RESERVES THE RIGHT TO CHANGE
DETAILS OF FIXTURE DESIGN AND
CONSTRUCTION AT ANY TIME.

Approved Cut Release option

If offered for Approved Cut Release in the Gammalux factory quote, the product in the accompanying purchase order is authorized by the GC to be released to production without the need for factory drawings for approval.

I confirm that:

- all ordering options are clearly noted (highlighted, boxed, written in, etc.) on page 1 of this fixture cut sheet
- quoted leadtime begins upon Gammalux's confirmation that the P.O. and marked cut sheet match their quote.
- the order will be released to production and a "record only" drawing will be provided prior to product shipment
- changes after Gammalux's release to production will result in a minimum 25% change fee which increases as production progresses.

General Contractor _____

GC's authorized Signature (or stamp below) _____

Signatory's printed name _____