


# GD36AD Ovalux Series

## Stacklite

### Direct Illumination



1 x PT



**GD36AD**  
3.625" wide direct luminaire

### Construction

**Housing:** Extruded aluminum body 3.625" wide x 6" high, 6063T5, 0.093" minimum thickness. Available in one piece, unbroken lengths up to 12'.

**Joiner System:** Automatic alignment, no loose parts, one tool to tighten two factory installed bolts for a hairline seam. No light leaks.

**Ballast:** Osram - Sylvania or equal instant start electronic ballast with less than 20% THD is standard: **EBL**. For electronic rapid start specify **ERS**. For ballast with less than 10% THD specify **LH** in the Options field.

**Mounting and Feed:** **SF** direct to surface mounting system.

### Electrical

UL listed wiring and components throughout. Housing is completely wired with quick-connect plugs at all mating joints and individually tested. No fixture disassembly and no field wiring is required to install rows.

All fixtures bear UL & CULDry Location labels. Damp Location labels are available. Specify **DL** in the Options field.

### Optical Performance

**Reflectors:** 87% reflectance white painted aluminum.


**Acrylic Prismatic Lens:** Specify **BB** for blade baffle.

**Blade Baffle:** Specify **APL** for optional 0.093" clear acrylic prismatic lens.

### Finish




Housing assembly is electrostatically sprayed with high solids aliphatic two component polyurethane to an average thickness of 2 mils. over acid etching primer. Specify **H** for high gloss in Paint Finish field. Specify **SG** for semi gloss.

### Standard Features

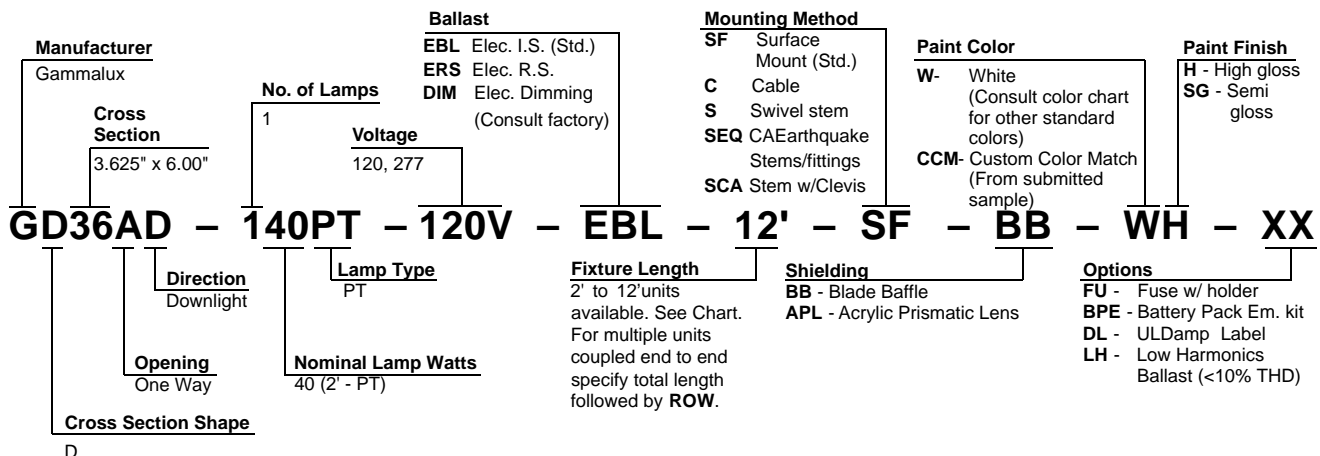

Mounting Dimensions

For individual and continuous rows of luminaires with direct to surface mounting.

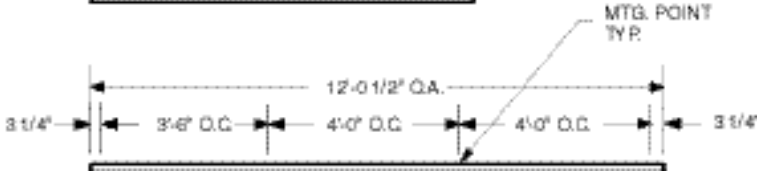

MTG. POINT  
TYP.