





Click or scan QR code to view latest spec sheet

NEED FLUORESCENT?
CLICK HERE

Revision Date: February 26, 2024
Gammalux Lighting Systems reserves the right to change details of fixture designs and construction at any time.

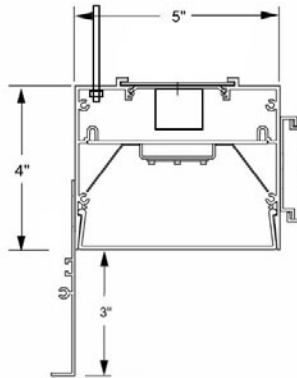

LED Lamping

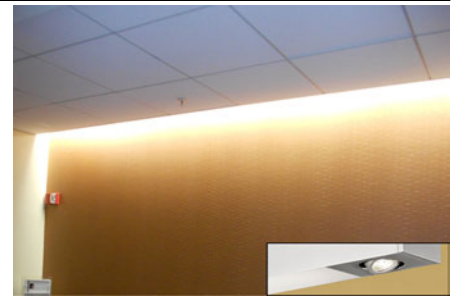

Click photo to view product page
Page 1: Overview & Nomenclature
Pages 2-3: Specifications
Pages 4-5: Photometric Info / Downloads
Page 6: Mounting Details
Pages 8-10: Custom Programming

Product Overview (for complete specifications, see pages 2 & 3) *****NEW***** See last page for **APPROVED CUT RELEASE**.

Quick Ship: Most product options are shippable within 2-3 weeks! Check our **Quick Ship Guide** for details.

Construction: I.C. rated. ARRA, RoHS, REACH and Prop 65 compliant. Extruded aluminum housing for superior fit and finish. Grid mounted version can be installed from below. Runs and patterns have a single item # and can be built to field dims.

Unbroken Illumination: Continuous illumination in custom-length runs and patterns with illuminated corners.

Electrical: LED components by major manufacturers, may be upgraded in the field to increase energy efficiency. Fixtures can be fitted with specialty LED and control components (consult factory). Standard Output, High Output and Custom Output options available.

Optical: Lenses available in medium and heavy diffusion, evenly illuminated.

Standard Nomenclature

Manufacturer	Output	Driver	Ceiling Interface	Paint Colors	Paint Finish
Gammalux	S Standard Output H High Output C Custom Output (see addendum page)	ZTV10 0-10V Dim to 10% For all options, see next page	GFR Gyp or grid w/ .5" cover flange GMR Gyp w/ mud flange	W White (See color chart for other colors) CCM Custom Color Match	H High Gloss SG Semi-Gloss
Optic Location	Color Temp. (nom)	Length Option	Wall Interface		
Regressed	27 2700K 50 5000K 30 3000K RGB* 35 3500K RGBW* 40 4000K	N Nominal S Specific	A Adjustable wall bracket		
Housing width					
5"					
GPRD5	1SL358	UNIV - ZTV10	4'N	REC/A/GMR	ASLMD
Distribution Direct	CRI** 8 for 80+ 9 for 90+	Run or Pattern Specify total run length (i.e. 43' 5 1/8") For illuminated patterns, follow overall length or dimensions with L, T, X, U, RECT or SQ (i.e. 43' 5 1/8" RECT or 10' X 10' SQ). If overall length or dims are unknown, use TBD and follow with L, T, X, U, RECT or SQ (i.e. TBD RECT or TBD SQ). Consult factory for complex or multi-plane patterns.	Mounting REC Recessed intra-wall RECW Recessed wall-to-wall	Options BPE Battery Pack (4' section) DL UL Damp Label EMERG Emergency Ckt 2CKT Dual Circuiting SBO Sensor By Others#	Shielding ASLMD Acrylic Satin Lens, Medium Diffuse ASLHD Acrylic Satin Lens, Heavy Diffuse
Series Perimeter	Lamp LED	Voltage 120V, 277V, UNIV			
	LED Arrays in X-Sec 1 (for white only) 2 (for RGB or RGBW only)				

** 90+ CRI increases watts nom. 14.5%. # Sensor by Others (consult factory). *** Field dims. required.

Specifications (continued on next page)

Electrical

Output: Standard (S) and high (H) options deliver a pre-set lumen package (see chart below). Custom-programmed output (C) is specified as LPF, WPF or % of High Output (see Custom Programmed Output page).

Static Driver: eldoLED [Optotronic](#)* programmable driver, wired for static operation (DVR).

0-10V Dimming: eldoLED [Optotronic](#)* programmable driver, wired for 0-10v control and dimming to 10% (ZTV10) or to 1% (ZTV1).

Step Dimming: Generic step dimming driver, two hot inputs for 100% and 50% output (SD2).

DALI Dimming: Generic DALI driver with two loose control wires exiting fixture at power feed location (DALI).

Lutron Dimming: [Hi-Lume](#) dim to 1% EcoSystem with Soft-On, Fade-to-Black (LDE1).

White Emitter: Nichia 757G emitters* binned within 3 MacAdam ellipses in Osram or Gammalux proprietary array. 90+ CRI option with extended lead time (CRI code 9) results in nominal 14.5% drop in efficacy; increase calculated watts 14.5%.

Battery Pack: Bodine [BSL10T3](#)* (BPE). 4W max input, 10W initial output, delivers min. 27% of High Output value per 4' length.

LED System: 70% lumen output (L70) at max 85 degrees C calculated at >60k hours. Fixtures are shipped with anti-static gloves to minimize the risk of damage to LEDs during installation. [5 year limited warranty](#).

Sensors: Sensors are as specified, confirmed by Gammalux prior to factory quote. Examples are Enlighted [Micro Sensor](#), Lutron [Athena Wireles Node](#), Lutron [Vive](#), Wattstopper [FS-205](#).

Upgrade Capability: LED assemblies can be replaced in the future with the latest factory-provided and fully warranted components. On-board sensors, control interface devices and alternate LED components may be specified (consult factory). Fixtures bear UL & cUL Dry Location label. Damp Location label available (DL).

*Subject to availability; may be substituted by Gammalux. Components and specifications may be changed without notice.

LUMENS AND WATTS BY OUTPUT OPTION AND LED COLOR @ 80+ CRI*											
STANDARD OUTPUT LED						HIGH OUTPUT LED					
MEDIUM DIFFUSE LENS (ASLMD)			DELIVERS: 530.5 LPF			MEDIUM DIFFUSE LENS (ASLMD)			DELIVERS: 707.3 LPF		
HEAVY DIFFUSE LENS (ASLHD)			DELIVERS: 400.7 LPF			HEAVY DIFFUSE LENS (ASLHD)			DELIVERS: 534.3 LPF		
CCT	2700 K	3000 K	3500 K*	4000 K	5000 K	CCT	2700 K	3000 K	3500 K*	4000 K	5000 K
WATTS / FT.	6.3	5.9	5.8	5.7	5.4	WATTS / FT.	8.6	8.2	8	7.8	7.4
*IES FILES WERE CREATED USING 3500K DIODES @80+ CRI. WATTAGE IS MULTIPLIED BY 1.08 FOR 2700K, 1.02 FOR 3000K, .98 FOR 4000K AND .93 FOR 5000K DIODES TO MAINTAIN THE SAME DELIVERED LUMENS THROUGHOUT ALL COLOR TEMPERATURES. FOR 90+ CRI, INCREASE WATTAGE BY 14.5%. SEE ADDENDUM FOR CUSTOM PROGRAMMING.											

Construction

Housing: I.C. rated. ARRA, RoHS, REACH and Prop 65 compliant. Extruded aluminum body 5" wide x 4" high, 6063T5, 0.070" min thickness. Each housing is 12' max unless longer housings are pre-coordinated with the factory to reduce joints and installation labor. Fixtures are built per approved factory drawings and tested as a complete system at the factory. Continuous runs and [patterns](#) are ordered, built and shipped with a single item #. Fixtures ordered as individuals are not designed to be joined together in the field.

Joiner System: Automatic alignment, no loose parts, one tool to tighten factory installed bolts for hairline seam. No light leaks.

Lamping: Patterns are fully illuminated. Runs ordered in Specific Length (Length Option S) will be built to the exact dimension shown on signature-approved shop drawings. Runs ordered in Nominal Length (Option N) may be factory-adjusted to accommodate standard mounting positions or grid centers. Factory drawings will show all dimensions of mounting and power feed locations. Fixtures built to less than 4' may require remote driver installation - consult factory.

Mounting: Shall be perimeter mounted to wall via Adjustable Wall Bracket (A) and recessed into a grid or hard ceiling. Power feed is accomplished through knockouts in housing. Fixtures can be ganged together mechanically and electrically in continuous rows. Fixtures surrounded by grid should be ordered in Nominal length (Length Option N) and can be installed from below.

Specifications (continued)

Optical

Reflectors: Shall be formed diffuse high reflectance aluminum.

Acrylic Satin Lens, Medium Diffuse: Snap-in. Shall be 100% DR acrylic (**ASLMD**).

Acrylic Satin Lens, Heavy Diffuse: Snap-in. Shall be 100% DR acrylic (**ASLHD**). See lens images on photometric pages.

Finish

Acid etched or clear anodized housing electrostatically sprayed with high solids aliphatic two component polyurethane high (**H**) or semi-gloss (**SG**) to an avg. thickness of 2 mils. Mounting components and power feed are white unless specifically ordered otherwise. Custom finish, consult factory. Wood Finishes, back page.

High Gloss Finish			Semi Gloss Finish			
						
White (WH)	Red (RH)	Yellow (YH)	White (WSG)	Silver (SSG)	Gray (GYSG)	Off White (OWSG)
						
Green (GH)	Blue (BH)	Black (BKH)	Light Gray (LGYSG)	Bronze (BZSG)	Satin Aluminum (SAPSG)	Black (BKSG)

Packing and Shipping

Fixtures built for continuous rows and patterns are given a specific location identifier, clearly identified on factory layout drawings, the fixture's ID Label, protective wrapping and on each end of fixture carton. Shipping pallets are built with 2" clearance, extending beyond the length and width of cartons, providing shipping protection.

Approx. weight of 4' module is 22 lbs. including carton. Weight of pallet and supplemental packing materials not factored in.

**Photometric Reports for
STANDARD OUTPUT FIXTURES**

FIXTURE USES LENS ASLMD (MEDIUM DIFFUSE) AND 3500 K BOARDS. @ 80+CRI



IESNA: LM 79-2008
ISSUEDATE: 08/19/2014
TEST: 1 MOD TO 2014 COMPONENTS
TESTLAB: Photopia 3.2.6
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GPRD5-1SOLED35-ASLMD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 102.2 LPW
DISTRIBUTION % UP: 2.9%
DISTRIBUTION % DOWN: 97.1%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 4.00 (Feet)
Length: 0.42
Height: 0.58
INPUT WATTS: 25.4



Acrylic Satin Lens,
Medium Diffuse
(ASLMD)

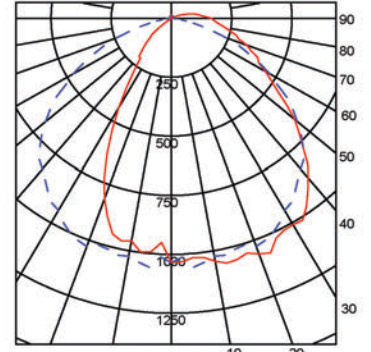

Bilaterally Symmetric
Solid: 180-0 Degrees Dashed: 90-270 Degrees

FIXTURE USES LENS ASLHD (HEAVY DIFFUSE) AND 3500 K BOARDS. @ 80+CRI



IESNA: LM 79-2008
ISSUEDATE: 08/19/2014
TEST: 1 MOD TO 2014 COMPONENTS
TESTLAB: Photopia 3.2.6
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GPRD5-1SOLED35-ASLHD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 74.7 LPW
DISTRIBUTION % UP: 2.9%
DISTRIBUTION % DOWN: 97.1%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 4.00 (Feet)
Length: 0.42
Height: 0.58
INPUT WATTS: 25.4



Acrylic Satin Lens,
Heavy Diffuse
(ASLHD)

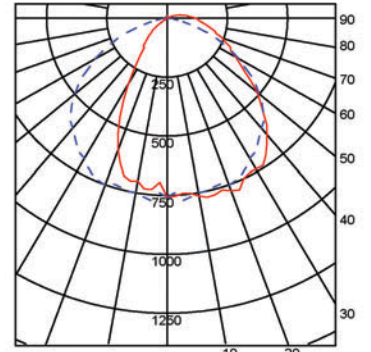

Bilaterally Symmetric
Solid: 180-0 Degrees Dashed: 90-270 Degrees

**Photometric Reports for
HIGH OUTPUT FIXTURES**

FIXTURE USES LENS ASLMD (MEDIUM DIFFUSE) AND 3500 K BOARDS. @ 80+CRI



IESNA: LM 79-2008
ISSUEDATE: 08/19/2014
TEST: 1 MOD TO 2014 COMPONENTS
TESTLAB: Photopia 3.2.6
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GPRD5-1HOLED35-ASL
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 97.1 LPW
DISTRIBUTION % UP: 2.9%
DISTRIBUTION % DOWN: 97.1%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 4.00 (Feet)
Length: 0.42
Height: 0.58
INPUT WATTS: 35.3



Acrylic Satin Lens,
Medium Diffuse
(ASLMD)

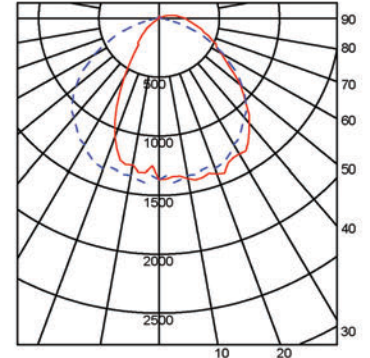

Bilaterally Symmetric
Solid: 180-0 Degrees Dashed: 90-270 Degrees

FIXTURE USES LENS ASLHD (HEAVY DIFFUSE) AND 3500 K BOARDS. @ 80+CRI



IESNA: LM 79-2008
ISSUEDATE: 08/19/2014
TEST: 1 MOD TO 2014 COMPONENTS
TESTLAB: ITL, INC
MANUFAC: GAMMALUX LIGHTING SYSTEMS
LUMCAT: GPRD5-1HOLED35-ASLHD
LAMPS: 73571 PLPG2-Bar-1100-835-289x38-DC

EFFICACY (Total): 70.9 LPW
DISTRIBUTION % UP: 2.9%
DISTRIBUTION % DOWN: 97.1%
CIE CLASSIFICATION: DIRECT

LUMINOUS OPENING: RECTANGULAR
Width: 4.00 (Feet)
Length: 0.42
Height: 0.58
INPUT WATTS: 35.3



Acrylic Satin Lens,
Heavy Diffuse
(ASLHD)

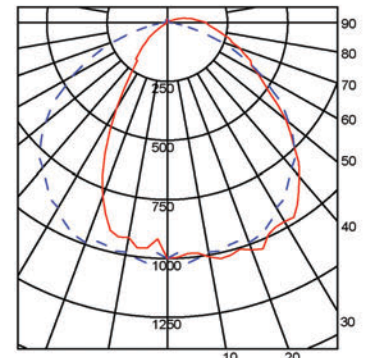


Bilaterally Symmetric
Solid: 180-0 Degrees Dashed: 90-270 Degrees

Mounting Details

Factory Drawings: Fully dimensioned factory drawings will be provided upon receipt of purchase order.

Perimeter Mount: Flanged

Specify **A/GFR** code in catalog #

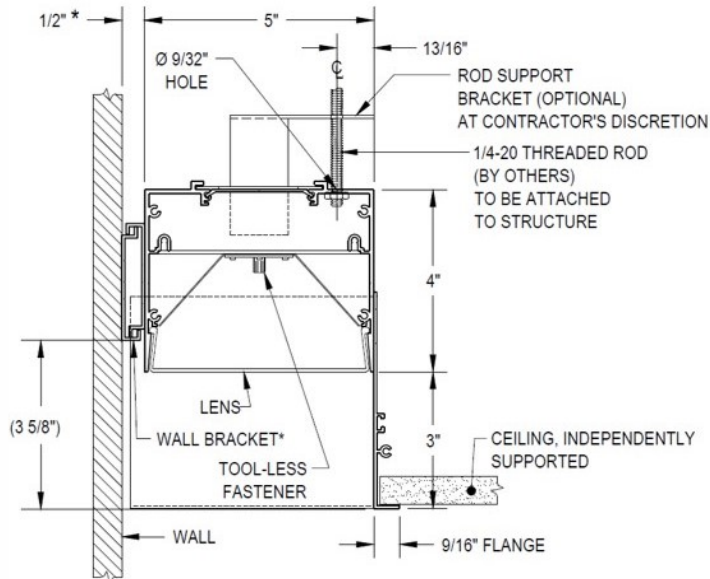


* WALL BRACKET, ADJUSTABLE FROM 3/8" TO 9/16"

Installation Summary

1. Pre-install threaded rod and power at locations shown on Gammalux shop drawings.
2. Install wall bracket per shop drawings.
3. If using optional exterior rod support bracket, raise fixture into place and support on wall bracket, then apply nut on threaded rod and level fixture.
If NOT using optional exterior rod support bracket, remove LED array and backing plate from locations indicated inside fixture, raise fixture into place and support on wall bracket, then apply nut on threaded rod and level fixture. Trim threaded rod and reinstall LED backing plate and LED array.
4. Make electrical and control connections.
5. Join continuous runs and test fixtures.
6. Install ceiling.

Perimeter Mount: Mud-in

Specify **A/GMR** code in catalog #

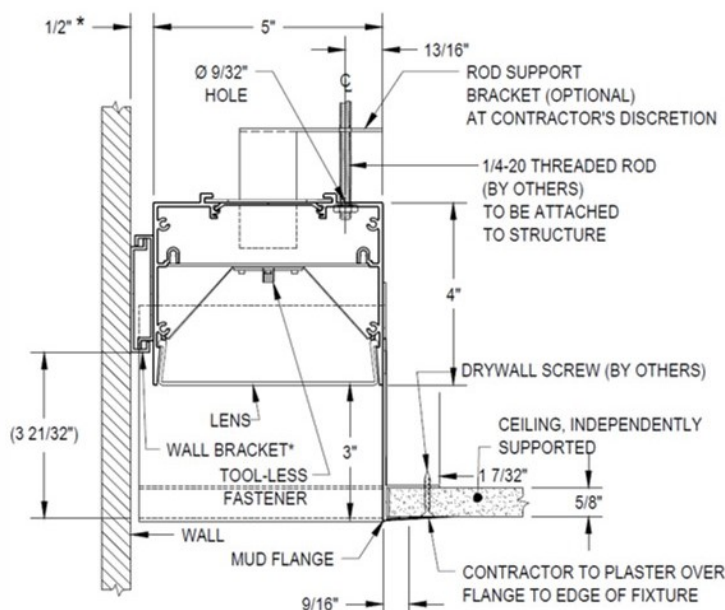

* WALL BRACKET, ADJUSTABLE FROM 3/8" TO 9/16"

Installation Summary

1. Pre-install threaded rod and power at locations shown on Gammalux shop drawings.
2. Install wall bracket per shop drawings.
3. If using optional exterior rod support bracket, raise fixture into place and support on wall bracket, then apply nut on threaded rod and level fixture.
If NOT using optional exterior rod support bracket, remove LED array and backing plate from locations indicated inside fixture, raise fixture into place and support on wall bracket, then apply nut on threaded rod and level fixture. Trim threaded rod and reinstall LED backing plate and LED array.
4. Make electrical and control connections.
5. Join continuous runs and test fixtures.
6. Insert gyp between upper and lower flanges, secure to upper flange with self-tapping drywall screws.
7. Apply joint tape and joint compound on lower flange and finish per architectural instructions.

Gammalux Lighting Systems reserves the right to change the details of fixture design and construction at any time.

Custom Programmed Output

Custom Programmed Output can be specified to produce approximate Delivered Lumens per Foot, Percentage of High Output Value or Maximum Watts per Foot.

Delivered Lumens Per Foot

Gammalux deals only in delivered lumens per foot. When working to match or exceed a competitor product's Lumens Per Foot package, be sure you are looking at their Delivered (through the lens) lumens per foot, not their System (bare board) lumens per foot.

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required Lumens Per Foot value (ie: if you need 600 lumens per foot delivered by the fixture, the line note would read "Program = 600 LPF").

Percentage of High Output Value

If the required delivered lumens per foot are not known, run lighting calculations using our High Output IES file and identify the percentage of increase or decrease required to produce the correct lighting in the space.

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required percentage of decrease from our High Output value (ie: for 60% of our High Output value, the line note would read "Program = 60% of High Output").

Maximum Watts Per Foot

In the Gammalux item #, use **C** as the Output designator and add a fixture description stating the required Maximum Watts per Foot (ie: if you need the fixtures capped at a maximum of 7 watts per foot, the line note would read "Program = 7 WPF").

For all three methods, custom programming capability is currently 25-200% of our High Output value. For requirements outside of this range, consult factory.

Approved Cut Release option

If offered for Approved Cut Release in the Gammalux factory quote, the product in the accompanying purchase order is authorized by the GC to be released to production without the need for factory drawings for approval.

I confirm that:

- all ordering options are clearly noted (highlighted, boxed, written in, etc.) on page 1 of this fixture cut sheet
- quoted leadtime begins upon Gammalux's confirmation that the P.O. and marked cut sheet match their quote.
- the order will be released to production and a "record only" drawing will be provided prior to product shipment
- changes after Gammalux's release to production will result in a minimum 25% change fee which increases as production progresses.

General Contractor _____

GC's authorized Signature (or stamp below) _____

Signatory's printed name _____

Approved Cut Release option

If offered for Approved Cut Release in the Gammalux factory quote, the product in the accompanying purchase order is authorized by the GC to be released to production without the need for factory drawings for approval.

I confirm that:

- all ordering options are clearly noted (highlighted, boxed, written in, etc.) on page 1 of this fixture cut sheet
- quoted leadtime begins upon Gammalux's confirmation that the P.O. and marked cut sheet match their quote.
- the order will be released to production and a "record only" drawing will be provided prior to product shipment
- changes after Gammalux's release to production will result in a minimum 25% change fee which increases as production progresses.

General Contractor _____

GC's authorized Signature (or stamp below) _____

Signatory's printed name _____